

10/537537, 080

Rec'd PCT/PTO 02 JUN 2005

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
17 June 2004 (17.06.2004)

PCT

(10) International Publication Number  
WO 2004/051001 A1

(51) International Patent Classification<sup>7</sup>: E01H 11/00, 1/05

(74) Agent: RIEMENS, R., H.; Exter Polak & Charlouis B.V.,  
P.O. Box 3241, NL-2280 GE Rijswijk (NL).

(21) International Application Number:

PCT/NL2003/000860

(22) International Filing Date: 4 December 2003 (04.12.2003)

(25) Filing Language:

Dutch

(26) Publication Language:

English

(30) Priority Data:

1022079 4 December 2002 (04.12.2002) NL

(71) Applicant (for all designated States except US): KINZO  
B.V. [NL/NL]; 37, Celsiusstraat, NL-6716 BZ Ede (NL).

(72) Inventors; and

(75) Inventors/Applicants (for US only): NUESINK, Jacob  
[NL/NL]; 1-39, Rijnstraat, NL-6916 BC Tolkamer (NL).  
ZEGWAARD, Cor, Pieter [NL/NL]; 25, Commanderiej,  
NL-3155 AA Maasland (NL).


(81) Designated States (*national*): AE, AG, AL, AM, AT, AU,  
AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR,  
CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD,  
GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR,  
KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN,  
MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU,  
SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA,  
UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (*regional*): ARIPO patent (BW, GH,  
GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),  
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),  
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,  
ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE,  
SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA,  
GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: ROTARY DEVICE FOR REMOVING WEEDS FROM JOINTS IN A PAVED AREA

(57) Abstract: Rotary device from removing weeds from joints in a paved area, comprising an elongate frame (22) which is provided with a handle (23), a drive unit (24) mounted on the frame (22), a brush element (25) which is connected to the drive unit (24) in such a manner that it can be driven in rotation about an axis of rotation which extends substantially in a direction which is transverse with respect to the frame (22), and a guide wheel (28) coupled to the frame (22), the guide wheel (28) and the brush element (25) being provided on either side of the bottom end of the frame (22). The distance (x) between the guide wheel (28) and a centre axis of the frame (22) is at least double the distance (y) between the brush element (25) and the centre axis of the frame (22).

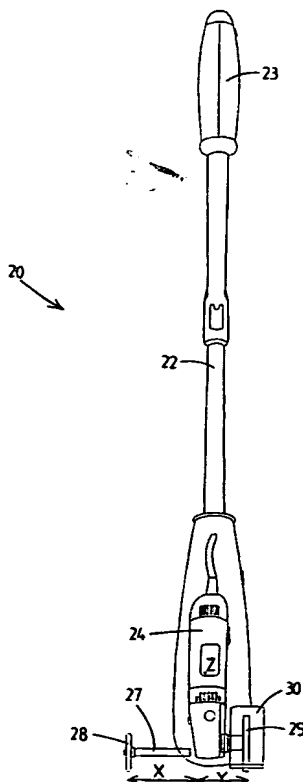

WO 2004/051001 A1



**Declaration under Rule 4.17:**

- *as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii)) for all designations*

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

**Published:**

- *with international search report*